


Project Info	
<b>Manager:</b>	HSC
<b>Resources:</b>	HSC, RK
<b>Start:</b>	15.07.2002
<b>End:</b>	

Version tree	2
History texts	4

## Version tree

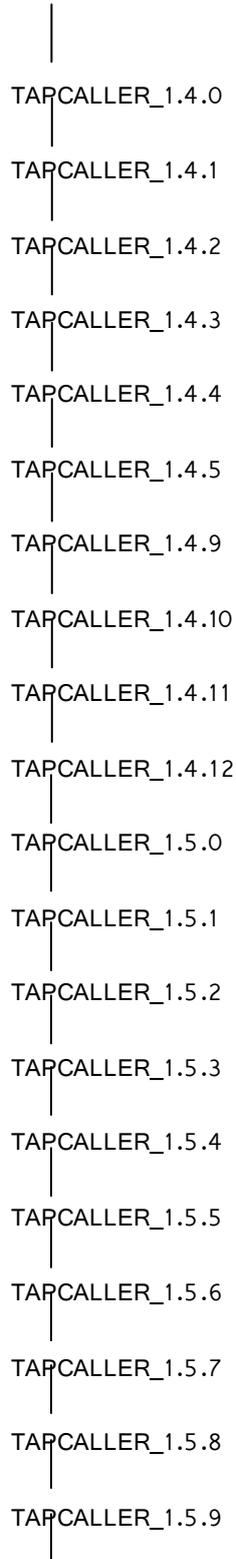

TAPCALLER\_1.5.10

|  
TAPCALLER\_1.5.11

|  
TAPCALLER\_1.6.0

|  
TAPCALLER\_1.6.1

|  
C\_TAPCALLER\_1.6.2\_IF\_GPF\_1.18.3

|  
C\_TAPCALLER\_1.6.3\_IF\_GPF\_1.18.5

|  
C\_TAPCALLER\_1.6.4\_IF\_GPF\_1.18.7

## History texts

<b>15.07.2002</b>	
- take over from JG development	
- application parameter parsing fixed	
<b>19.07.2002</b>	
- version.h added	
- directory structure addapted	
- makefile addapted	
- several problems concerning work with PCO solved	
- tapcaller.bat added	
<b>01.08.2002</b>	
- tap.svc added	
- stack-Button added	
- several problems concerning work with PCO solved	
<b>05.08.2002</b>	
- failed sub testcase shown correctly	
<b>08.08.2002</b>	
- view logfile -> usage of new “-open”-parameter of viewer	
<b>12.08.2002</b>	<b>TAPCALLER_1.4.0</b>
- “<new config>” for new PCO-Viewer configs added	
<b>16.08.2002</b>	
- first version of tapcaller_intro.ppt	
<b>29.08.2002</b>	
- pcon option directly supported in dialog	
<b>02.09.2002</b>	
- PCO-Viewer-config support improved	
<b>11.09.2002</b>	
- short intro added for first start	
<b>12.09.2002</b>	
- gpf\cfg directory introduced	
- pco-server now started only if needed	

<b>16.09.2002</b>	<b>TAPCALLER_1.4.1</b>
- tap will be really closed by halt-button	
<b>19.09.2002</b>	
- more PCO-Viewer-Configurations will be shown in context menu	
<b>23.09.2002</b>	
- halt kills old-TAP now	
<b>26.09.2002</b>	
- initial directory setting fixed	
<b>27.09.2002</b>	
- double click -> testcase execution	
- PS wait-time configurable	
- logfiles may be watched while testcase runs	
- TAP timeout settable in dialog	
<b>30.09.2002</b>	<b>TAPCALLER_1.4.2</b>
- documentation updated	
<b>11.11.2002</b>	
- support for very old TAP re-enabled	
<b>14.11.2002</b>	
- Bug when switching between tabs in setting-dialog (e.g. new path to tap-exe lost)	
<b>28.11.2002</b>	
- Bug when selecting the last shown testcase in the selection list fixed	
<b>11.12.2002</b>	
- usage of fixed sh.exe	
<b>16.12.2002</b>	
- viewing of dbg-files with spaces in name supported now	
<b>19.12.2002</b>	
- reset-button introduced	
<b>16.01.2003</b>	
- Option of starting PS only once at beginning of a bunch of testcases	
- Visibility of window always assured	
<b>17.01.2003</b>	<b>TAPCALLER_1.4.3</b>
- Userguide can be opened from menu	
- More error-message-boxes	
- tst will be started standalone now	

<b>17.02.2003</b>	<b>TAPCALLER_1.4.4</b>
<ul style="list-style-type: none"> <li>- reset button always available</li> <li>- some internal issues fixed</li> <li>- testtools release 30</li> </ul>	
<b>17.02.2003</b>	<b>TAPCALLER_1.4.5</b>
<ul style="list-style-type: none"> <li>- very long tcc-file paths supported now</li> <li>- support of testcase-names with 4 numbers added -&gt; TAPCAL-FIX-8669 fixed</li> </ul>	
<b>14.03.2003</b>	<b>TAPCALLER_1.4.6</b>
<ul style="list-style-type: none"> <li>- Add and use method CheckSingleDll. Special hack for single DLLs, that have a digit inside of the - name (particularly L2R.dll).</li> </ul>	
<b>19.03.2003</b>	<b>TAPCALLER_1.4.7</b>
<ul style="list-style-type: none"> <li>- Increased DEF_TAP_TIMEOUT.</li> </ul>	
<b>09.04.2003</b>	<b>TAPCALLER_1.4.8</b>
<ul style="list-style-type: none"> <li>- Be sure that protocol stack is terminated after running a test case, before doing</li> <li>- Increase PCOC_TIMEOUT and DEF_TAP_TIMEOUT.</li> <li>- Use hard TerminateProcess for Stack.</li> </ul>	
<b>23.04.2003</b>	
<ul style="list-style-type: none"> <li>- no more unnecessary “deletion failed”-messages</li> </ul>	
<b>02.05.2003</b>	<b>TAPCALLER_1.4.9</b>
<ul style="list-style-type: none"> <li>- no more waste of windows handles</li> <li>- default configs for clearcase views</li> <li>- PS selection in testcase-dialog</li> </ul>	
<b>19.05.2003</b>	
<ul style="list-style-type: none"> <li>- usage of MapDebugInformation( ) instead of manually open testDLLs to find functions</li> <li>- The dark blue Run-Button now runs actually only the untested testcases</li> </ul>	
<b>21.05.2003</b>	
<ul style="list-style-type: none"> <li>- finding of basename of test dll/suite improved</li> <li>- TAPCAL-FIX-10251 solved</li> </ul>	
<b>22.05.2003</b>	
<ul style="list-style-type: none"> <li>- application shutdown more “soft”</li> <li>- config dialog behaviour improved</li> </ul>	
<b>26.05.2003</b>	<b>TAPCALLER_1.4.10</b>
<ul style="list-style-type: none"> <li>- STOP-Button will shutdown tap no more</li> <li>- double click on tcc-file works now</li> </ul>	

<b>28.05.2003</b>	
- usage of MapDebugInformation( ) removed, testDLLs are manually opened again to find functions, but routine improved	
- hack to enable title-loading until real cms.dll is not linked on fixed base address	
<b>02.06.2003</b>	<b>TAPCALLER_1.4.11</b>
- release	
<b>04.06.2003</b>	
- The about box contains a link to the readme file	
<b>05.06.2003</b>	<b>TAPCALLER_1.4.12</b>
- Double click on <Unknown/Untested> item will start test, Double click on <Passed/Failed> will open logfile	
- rudimentary protocol export may be accessed via File/Protocol	
<b>11.07.2003</b>	
- title loading improved	
- adaptation to new VCMS feature allowing multiple test environments in parallel on one	
<b>21.07.2003</b>	
- Predefined communication setting are available in Settings/TAP-Options dialog	
- A special ccddata-dll can be specified in Settings/TAP-Options dialog	
<b>30.07.2003</b>	
- TAP result “Excluded” now supported	
<b>15.08.2003</b>	
- New document numbers for Userguide and developers description: 06-03-31-UDO,	
- Userguide and developers description: merge of new official format	
<b>21.08.2003</b>	
- “tap2 -n” is used to generate temporary dbg-file of testcases for mscview	
<b>05.09.2003</b>	
- TAPCAL-FIX-12005 fixed	
<b>10.09.2003</b>	
- TAPCAL-FIX-12007 fixed	
- introduction updated	
<b>15.09.2003</b>	
- The default PCO-Viewer-Configuration can be selected under Settings/PCO	
<b>17.09.2003</b>	<b>TAPCALLER_1.5.0</b>
- Userguide updated	

<b>02.10.2003</b>	
- title loading is now independent from if start-dir	
- tap.svc.default contains also ~TDC -> issue UMTS-ENH-12498	
<b>13.10.2003</b>	
- Update information can be redisplayed via '?'-menu	
<b>20.10.2003</b>	<b>TAPCALLER_1.5.1</b>
- Issue TAPCAL-ENH-12453 fixed -> predefined communication config will be	
- autosave introduced	
<b>31.10.2003</b>	
- Strg->Ctrl in menu	
<b>19.11.2003</b>	<b>TAPCALLER_1.5.2</b>
- some internal fixes	
- before deleting test results pco-server will be contacted to close evtl. open logfile and stop evtl. running test session	
<b>15.12.2003</b>	<b>TAPCALLER_1.5.3</b>
- handling of TAP return codes enhanced	
<b>07.01.2004</b>	
- support for context menu key added -> issue 15895	
- Drag&Drop for .tcc-files enabled	
<b>08.01.2004</b>	
- problems with paths including spaces solved	
<b>09.01.2004</b>	<b>TAPCALLER_1.5.4</b>
- creation of dbg-files now configurable	
<b>14.01.2004</b>	
- stx-option in TAP-Dialog added	
- settings- and selection-dialog can be opened also during test run	
<b>26.01.2004</b>	
- context menu key will popup menu at position of first selected list entry	
- setting to automatically start PCO-Viewer(s) during test execution more easy now	
<b>28.01.2004</b>	<b>TAPCALLER_1.5.5</b>
- check for already running PS before automatically starting one	
<b>02.02.2004</b>	
- environment variable TST_NO_AUTOSTART set before loading titles	
- titles are stored in tcc files	

- columns placement can be modified	
<b>03.02.2004</b>	<b>TAPCALLER_1.5.6</b>
- test case selection handling improved	
- exception handling in case of unknown/too new tcc-file added	
<b>16.02.2004</b>	
- blanks in PCO-cfg-path supported now	
<b>17.02.2004</b>	
- support for local running improved	
<b>18.02.2004</b>	
- test-dir cleaning will now delete only known files to keep, e.g., ccddata-dlls from	
<b>19.02.2004</b>	
- ccddata-path can now be found in testcase-selection dialog	
<b>05.03.2004</b>	<b>TAPCALLER_1.5.7</b>
- title loading secured by __try() - __except() -> ISSUE: TAPCAL-FIX-18315	
- PS crash will be detected after test run	
<b>16.04.2004</b>	<b>TAPCALLER_1.5.8</b>
- PS will be restarted if stack sync failed	
- “Untested” will be shown correctly after deleting a testcase	
<b>22.04.2004</b>	
- no exit if initial config-file could not be read	
- load-defaults will clean the visual list in any case	
<b>06.05.2004</b>	<b>TAPCALLER_1.5.9</b>
- mall -test introduced	
- current dir will be set to exe-path at startup	
<b>17.06.2004</b>	
- menu entry “load default config” adapted to local running	
<b>18.06.2004</b>	<b>TAPCALLER_1.5.10</b>
- PS start/stop and run checking improved	
<b>28.07.2004</b>	<b>TAPCALLER_1.5.11</b>
- improve pco-server running detection	
<b>17.08.2004</b>	
- XML import/export of settings -> PCO-ENH-20788 solved	
- -impcfg parameter introduced	
- command line options section in userguide	

<b>23.08.2004</b>	<b>TAPCALLER_1.6.0</b>
- userguide as pdf	
<b>27.08.2004</b>	<b>TAPCALLER_1.6.1</b>
- time-column can be disabled in protocol output	
- no more path-change if loading/storing configuration	
<b>22.10.2004</b>	<b>C_TAPCALLER_1.6.2_IF_GPF_1.18.3</b>
- start with TheKeep	
- swa00003003: TAPCALLER should support all upper case testcase names	
<b>28.10.2004</b>	
- swa00024740: TapCaller should get a new button to support the Tap command line	
<b>02.11.2004</b>	
- swa00024861: Differentiation of failed and passed cases should be more visible	
<b>10.11.2004</b>	<b>C_TAPCALLER_1.6.3_IF_GPF_1.18.5</b>
- swa00025042: TAPCaller should support Multilayer/TCSL-test cases also in local	
- swa00025018: End of support for OLD-HEADER should be visible in TAPCaller	
<b>19.11.2004</b>	
- swa00025146: TAP/TAPCaller should support comports higher then 4 for test interface	
- swa00025347: All GPF components should support mall.bat-parameters "-test" and "-"	
<b>07.01.2005</b>	<b>C_TAPCALLER_1.6.4_IF_GPF_1.18.7</b>
- swa00025154: Suggestion for improvement of the TAPcaller	
- swa00025822: preparation of all mall.bat and makefile for automatic testsystem	